




MESIT
defence

www.mesit.cz

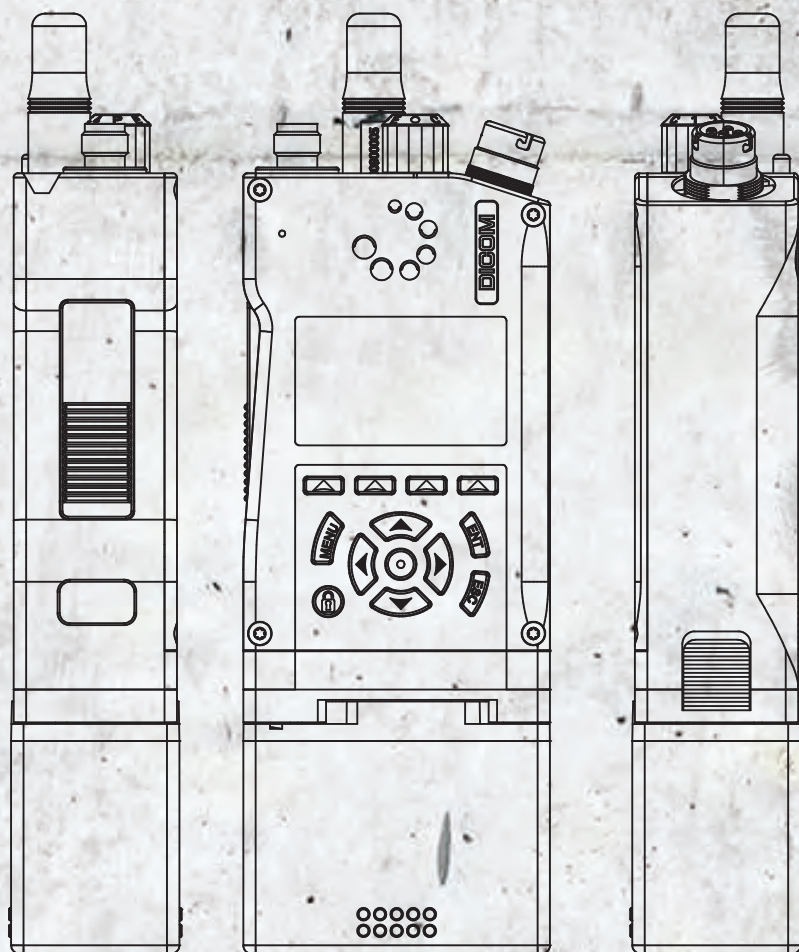

T H O R O U G H B R E D

RF4



with True MANET Bandwidth Saving VHF/UHF Waveform

System Highlights

- multi-channel radio system
- simultaneous voice and IP data transmissions including video support
- decentralized, auto-forming, true multi-hop MANET network for voice and data
- multiple voice streams in one channel (virtual channels)
- bandwidth saving 250 kHz channel with up to 270 kbit/s data rate in low VHF
- highly secure AES based COMSEC
- native position reporting system (GPS, Galileo, Glonass)
- up to 10 W RF power output (handheld)
- 50 W vehicular amplifier with jerk-and-run support

The RF40 Thoroughbred Radio System is a versatile system for secure tactical radio data and voice communication in VHF and UHF bands. Its main features are excellent RF parameters, efficient utilization of the available frequency spectrum, high data rate throughput even in low VHF band, voice and data true MANET capabilities, dual voice stream with data in one channel, second physical radio channel with tactical Ethernet broadband data/voice Mission Module, optional SATCOM-on-the-move communication module and vehicular amplifier with jerk-and-run capability of the handheld radio.

Handheld Technical Specification

General

| | |
|--------------------|---|
| Frequency range | 30 - 512 MHz |
| Modulation | FM, AM, CPM |
| Transmitting power | 5 W / 10 W burst |
| Channel bandwidth | 25 kHz, 250 kHz |
| Waveforms | LOS FM/AM (STANAG 4204/4205) WF40 (V/UHF MANET WF, native IP capable) HW20 (VHF EPM WF, IP capable via MIL-STD-188-220) |
| Encryption | AES based, key length up to 384 bits |
| GNSS receiver | built-in (GPS/Glonass/Galileo) |
| Data interfaces | Ethernet, USB, Serial |

Mechanical, Climatic and EMC

| | |
|-------------------------|---|
| Dimension incl. battery | (74 x 202 x 41) mm |
| Weight incl. battery | 0.9 kg |
| Temperature range | -40 °C to +70 °C |
| MIL-STD-810F | low/high temperature, humidity, low pressure, 1 m immersion, icing / freezing rain, salt fog, sand and dust, vibration, shock, bench handling |
| MIL-STD-461F | CE102, CS101, CS114, RE102, RS103 |



MESIT
defence

www.mesit.cz

